

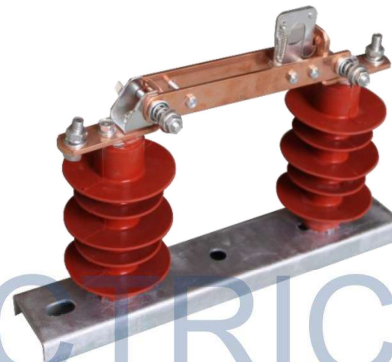


Type	Rated voltage (kv)	Rated current (A)	Limit current (kA)		10s Thermally stable current (kA)
			value Peak	Effective value RMS	
(H)GW9-12G/200	12	200	5	9	5
(H)GW9-12G/400	12	400	21	15	10
(H)GW9-12G/630	12	630	35	25	14
(H)GW9-12G/800	12	800	55	35	20
(H)GW9-12G/1000	12	1000	80	45	28
(H)GW9-12G/1250	12	1250	120	55	39
(H)GW9-10/200A	10	200	5	9	5
(H)GW9-10/400A	10	400	21	15	10
(H)GW9-10/630A	10	630	35	25	14
(H)GW9-10/800A	10	800	55	35	20
(H)GW9-10/1000A	10	1000	80	45	28
(H)GW9-10/1250A	10	1250	120	55	39

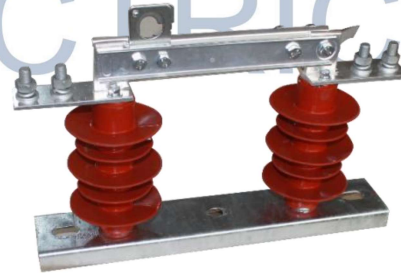

Type	Rated voltage (kv)	Rated current (A)	Limit current (kA)		10s Thermally stable current (kA)
			value Peak	Effective value RMS	
GWDCD1	12	630(1250)	5	9	5
GWDCD2	12	630(1250)	21	15	10

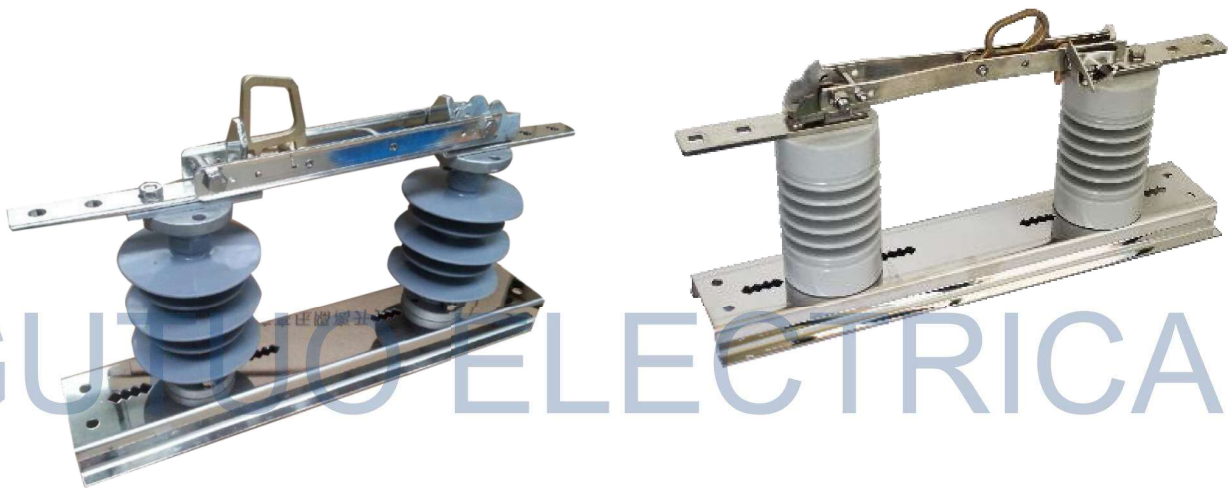

GW1-12 Series outdoor high voltage isolation switch

RH-B series outdoor high voltage isolate switch

Type	Rated voltage (kV)	Rated current (A)	4S heat steady e.c (A)	Short current (A)	Impulse withstand voltage (kV)	Power-frequency withstand voltage (kV)
RH-B	11	400	12500	31500	95	42
RH-B	33	600	12500	31500	180	80



WALL BUSHING

