



No.	Type	Rated voltage (kv)	Rated current (A)	Breaking current (A)	Impulse voltage (BIL)	Power-frequency withstand voltage(kV)	Leakage distance (MM)	Weight (KG)	Dimensions (CM)
1	(H)RW1 1	10(F)	100(200)	6300	110	42	260	7.5	48x32x27
2	(H)RW1 0	10(F)	100(200)	8000	110	42	260	7.5	

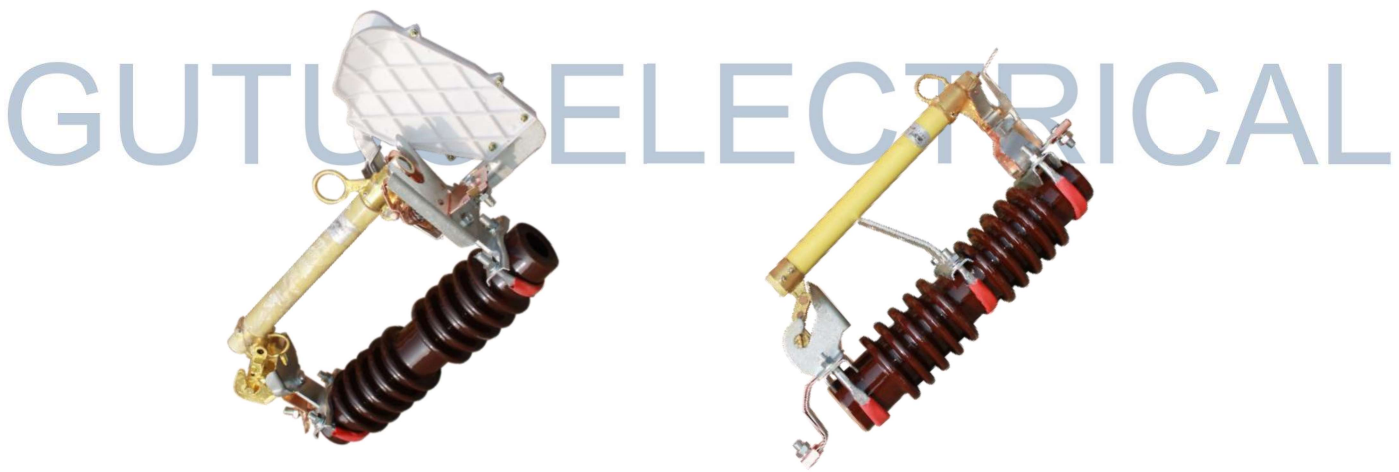


No.	Type	Rated voltage (kv)	Rated current (A)	Breaking current (A)	Impulse voltage (BIL)	Power-frequency withstand voltage (kV)	Leakage distance (MM)	Weight (KG)	Dimensions (CM)
1	(H)RW1 2	12(F)	100	6300	110	40	250	6.5	40x36x11.5
2	(H)RW1 2	12(F)	200	12500	110	40	250	6.5	

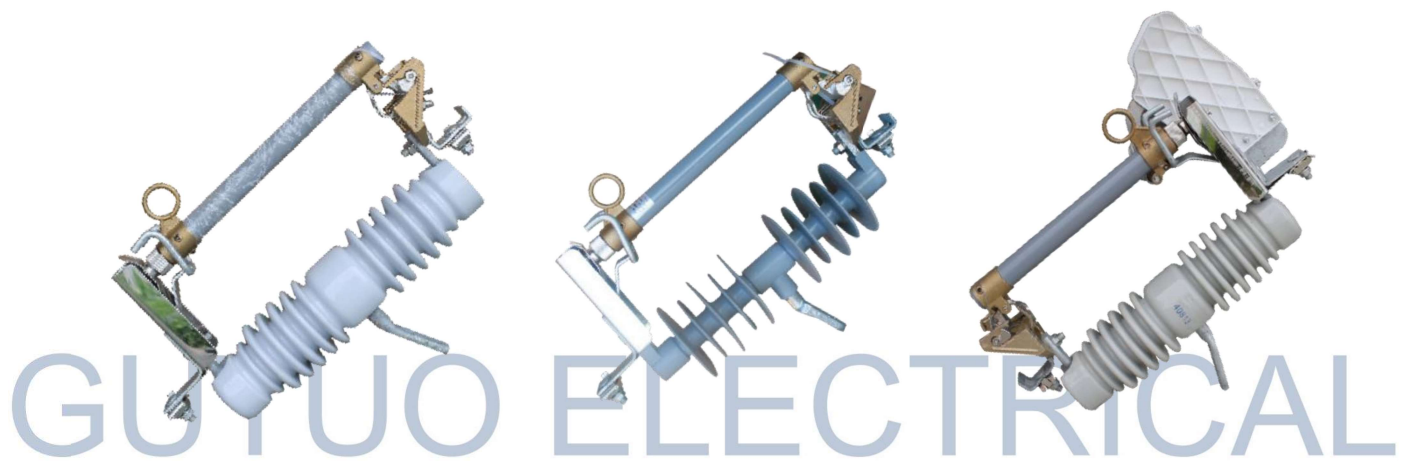


No.	Type	Rated voltage (kv)	Rated current (A)	Breaking current (A)	Impulse voltage (BIL)	Power-frequency withstand voltage (kV)	Leakage distance (MM)	Weight (KG)	Dimensions (CM)
1	GWNC X1	12	100	6300	125	42	260	7.5	58x32x11.5
2	GWNC X2	12	200	12500	125	42	260	7.5	


GUTUO ELECTRICAL

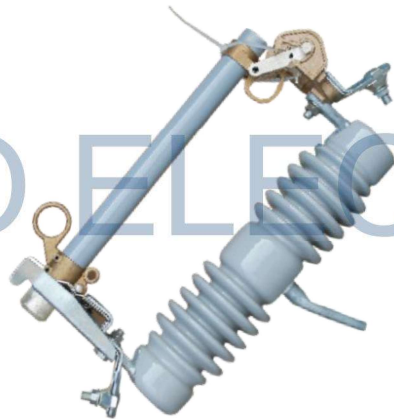

No.	Type	Rated voltage (kv)	Rated current (A)	Breaking current (A)	Impulse voltage (BIL)	Power-frequency withstand voltage (kV)	Leakage distance (MM)	Weight (KG)	Dimensions (CM)
1	(H)FCR	11/15(F)	100	6300	110	42	260	7.5	58x32x11.5
2	(H)FCR	11/15(F)	200	12500	110	42	260	7.5	


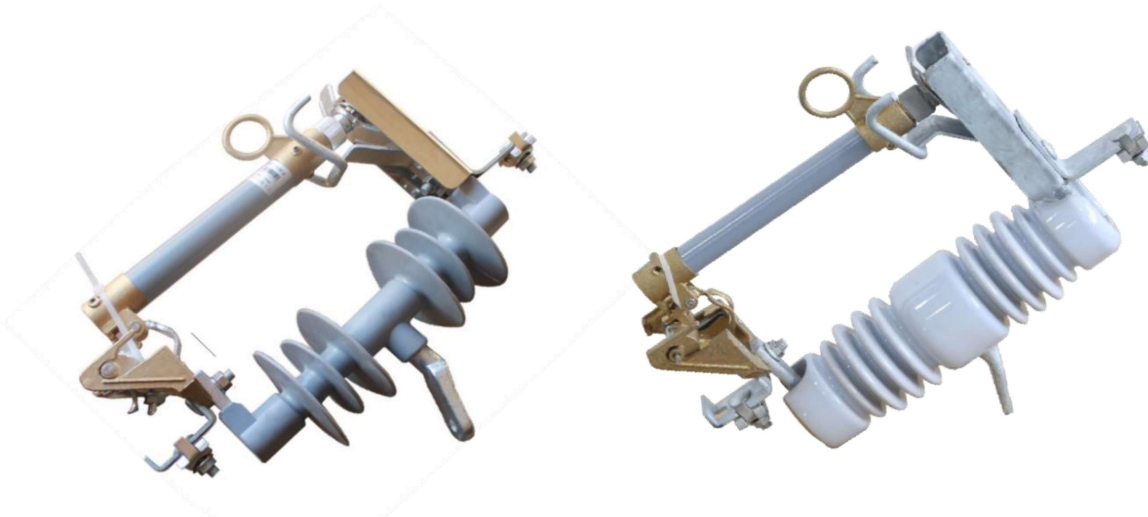


No.	Type	Rated voltage (kv)	Rated current (A)	Breaking current (A)	Impulse voltage (BIL)	Power-frequency withstand voltage (kV)	Leakage distance (MM)	Weight (KG)	Dimensions (CM)
1	(H)FCR	24/33(F)	100	6300	150	70	750	12	58x38.5x14.5
2	(H)FCR	24/33(F)	200	12500	150	70	750	12	

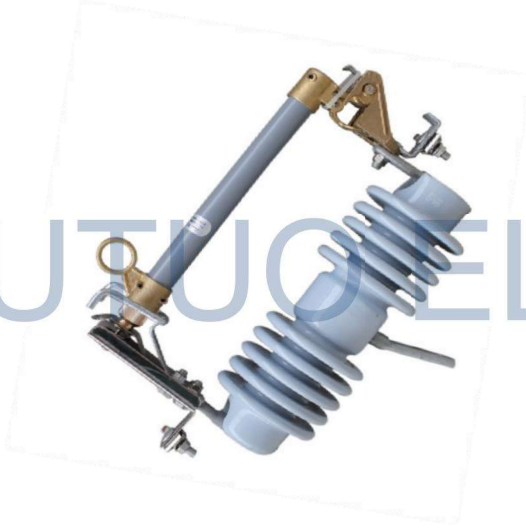


GUTUO ELECTRICAL

No.	Type	Rated voltage (kv)	Rated current (A)	Breaking current (A)	Impulse voltage (BIL)	Power-frequency withstand voltage (kV)	Leakage distance (MM)	Weight (KG)	Dimensions (CM)
1	(H)FCR	33/36(F)	100	10000	170	95	1000	14	70.5x39.5x14.5
2	(H)FCR	33/36(F)	200	12500	170	95	1000	14	

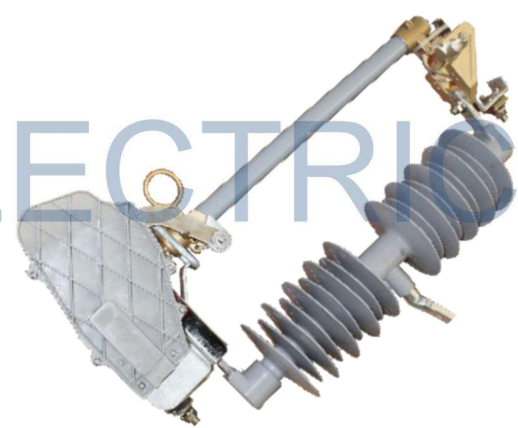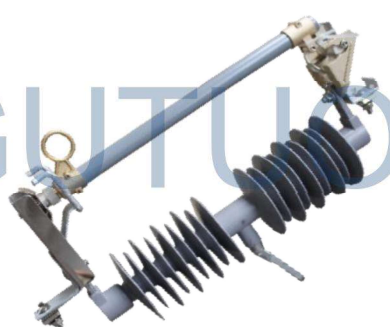

GUTUO ELECTRICAL

No.	Type	Rated voltage (kv)	Rated current (A)	Breaking current (A)	Impulse voltage (BIL)	Power-frequency withstand voltage (kV)	Leakage distance (MM)	Weight (KG)	Dimensions (CM)
1	(H)PRG1	35	100	10000	170	95	1200	14	70.5x39.5x14.5
2	PRG2	35	200	12500	170	95	1200	14	

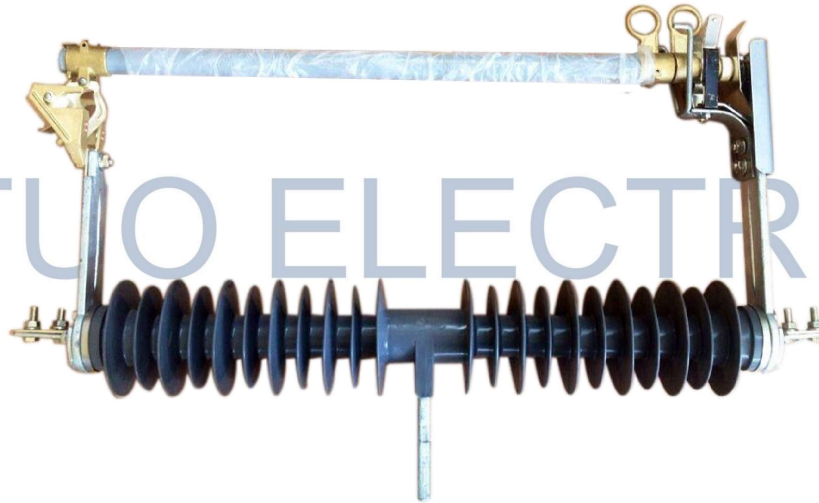

No.	Type	Rated voltage (kv)	Rated current (A)	Breaking current (A)	Impulse voltage (BIL)	Power-frequency withstand voltage (kV)	Leakage distance (MM)	Weight (KG)	Dimensions (CM)
1	RW5	35	100	10000	170	95	1200	18	70.5x39.5x14.5
2	HRW5	35	200	12500	170	95	1200	14	

